


# Start Here - BUBBLING LED KIT 3 GALLON HALF MOON Quick Setup Guide

## 1 Part Identification

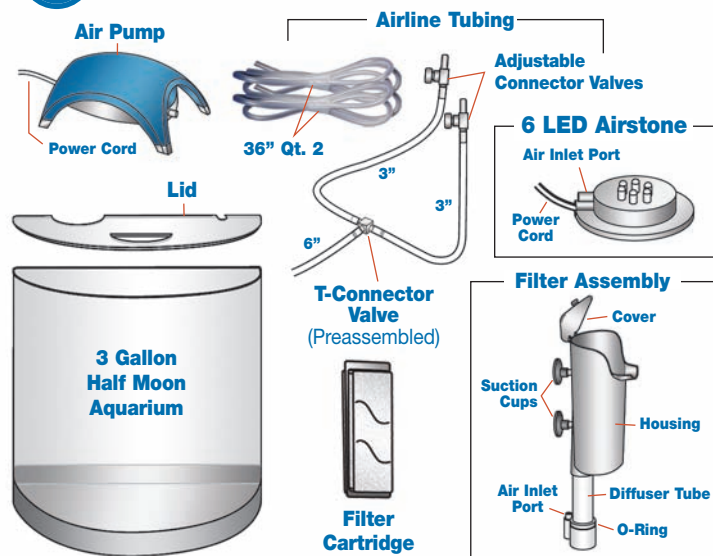

## 2 Filter Setup


**A.** Remove Filter Cartridge from package and rinse.

**B.** Insert Filter Cartridge into Housing.



**C.** Connect a 36" Airline Tubing to the (Diffuser Tube) Air Port Inlet.


**D.** Connect the other end to one of the Adjustable Connector Valves.

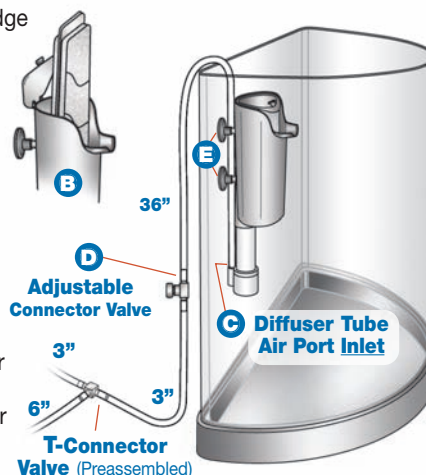

## 3 LED Airstone Setup

**A.** Connect a 36" Airline Tubing to the LED Airstone's Air Port Inlet.

**B.** Connect the other end to the other Adjustable Connector Valve.

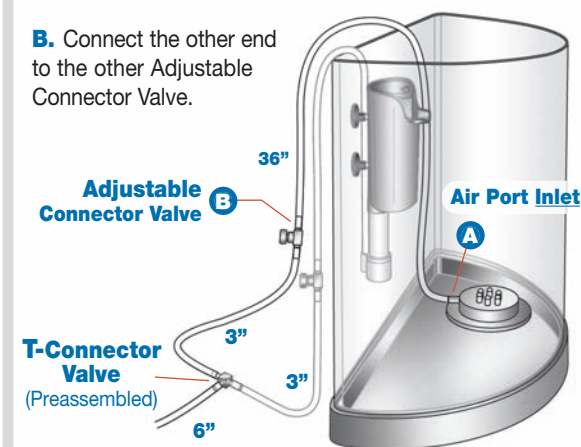

## 4 Air Pump Setups (Typical or Above Tank)

**A.** Connect the 6" Tube coming from the T-Connector Valve to the Air Pump Air Port Outlet.

**B1. Typical Setup:** Place Air Pump lower than water level in aquarium. Use a Check-Valve (Sold Separately) between the Air Pump and the T-Connector Valve.


**NEVER:** Place Air Pump directly below aquarium.

**NOTE:** To avoid water siphoning into the Air Pump during electrical power failure or when removing filter, a Check-Valve (Sold Separately) is recommended.

**B2. Above Tank Setup:** Place Air Pump 12" higher than water level in aquarium. This helps prevent water siphoning into Air Pump.

**NOTE:** A Check-Valve (Sold Separately) is optional with the (Above Tank) setup.

**NEVER:** Place Air Pump directly above aquarium.

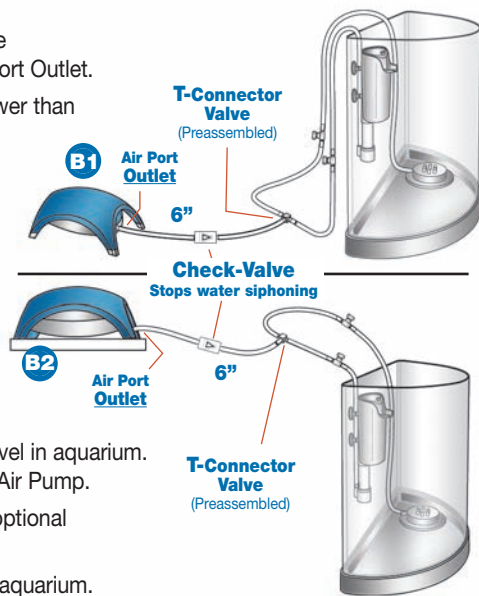

## 5 Prepare Aquarium and Start Air Pump



Water Level at Filter Spillway

Room Temperature


**A.** Fill Aquarium with gravel and décor.

**B.** Add water and Tetra AquaSafe. Water level should be at the Filter Spillway.

**NOTE:** Bury LED Airstone edges with gravel, to keep it in place.

## 6 Start Up

**A.** Place Lid on Aquarium. Route Air Tubes and LED Airstone power cord through cutouts in Lid.

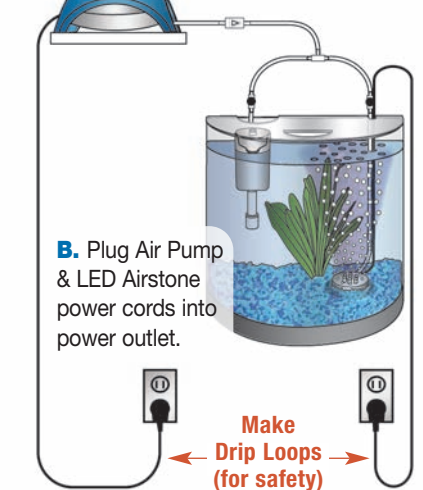

**B.** Plug Air Pump & LED Airstone power cords into power outlet.

Make Drip Loops (for safety)