


The best way to put the Super Feeder back together is to assemble everything except the three tubes. This way, you can easily put the nut on the center rod. Then you lift the index plate and feeder cover and insert the tubes into position. After they are positioned, you can tighten the feeder by lifting and turning the loop on the center rod in a clockwise direction until you cannot turn it any more.

This drawing shows the location of the three tubes in relation to the base of the feeder. Note that on the feeder base there are arrows with numbers near the outer edge of the base. The tubes fit into the spaces marked 3/4 and 3. Opposite the arrows on the base, there is a T-shaped key into which the slot in the clear feeder tube fits.



This drawing shows the location of the three tubes in relation to the index plate (top) of the feeder. Note that the three holes in the top plate are located in relation to the tubes, as shown with dashed lines.

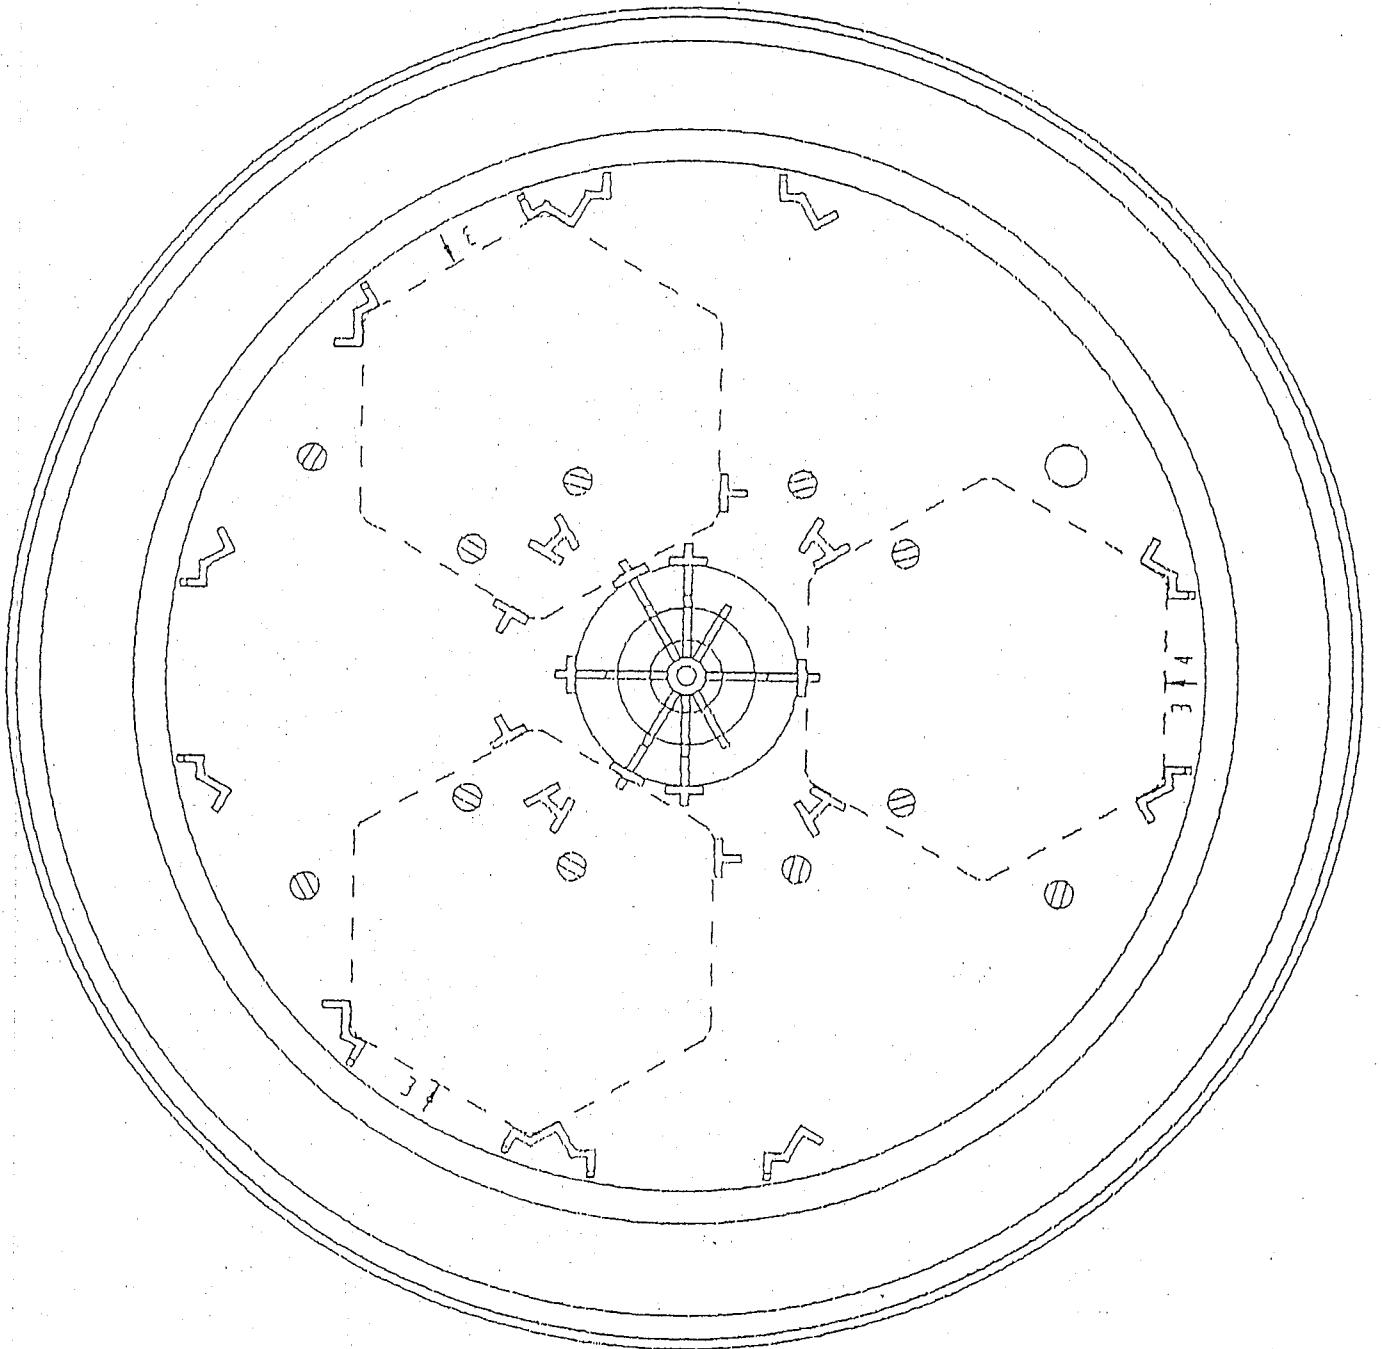