

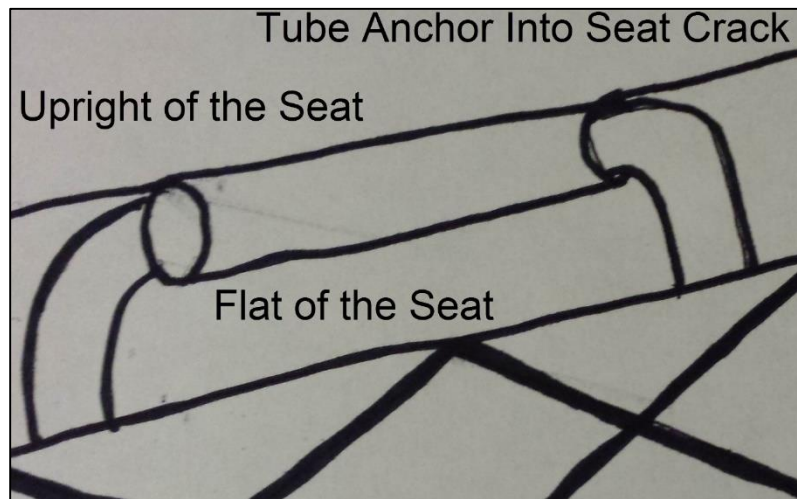


Car Cover Installation Instructions


1. **Note:** The plastic tube anchors are the backside. To prevent sliding, slide the plastic tube anchors (on the backside of the cover) into the seat cushion cracks to tuck the cover in.

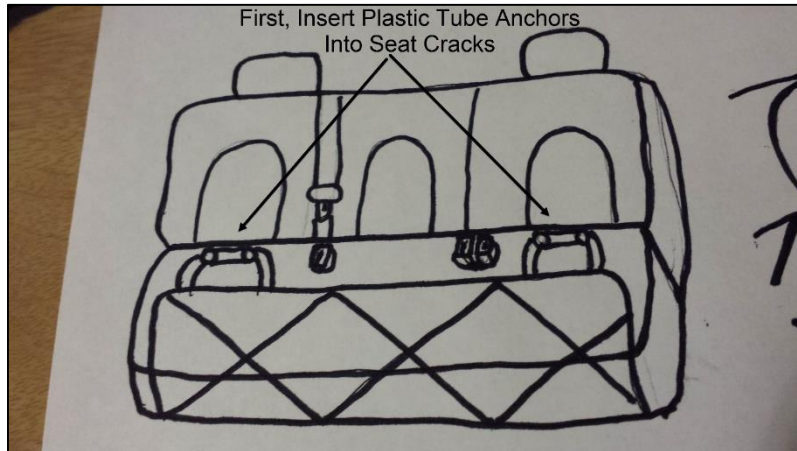

2.) Loop the cover's headrest straps around the backseat's headrests. If you prefer to use the cover as a hammock, also attach them to the front seats' headrests. Adjust the length as needed with the adjustable straps.

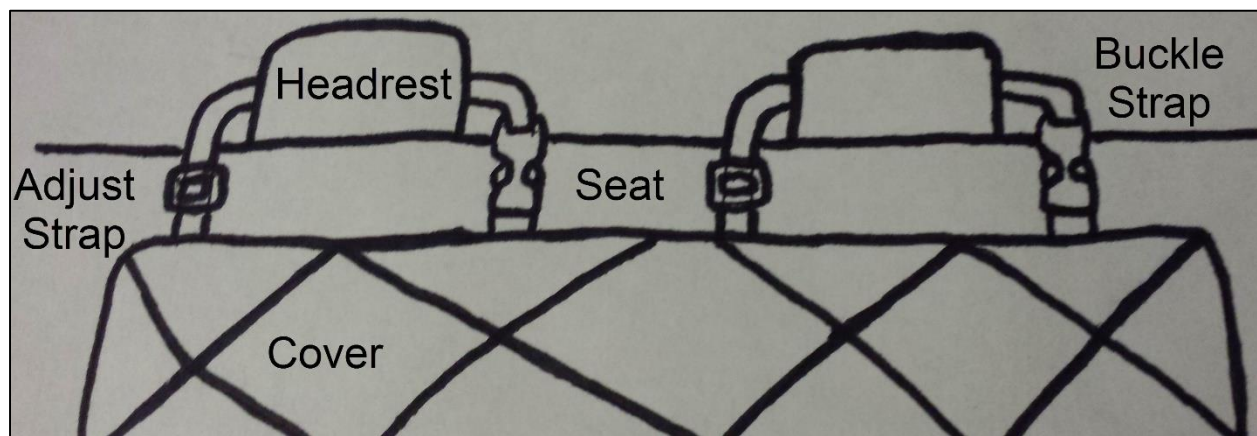

3. If a person needs to use the car's seatbelt, buckle the seatbelt through the seatbelt hole openings in the cover. If the cover blocks the seatbelt from fastening properly, do not use the cover.

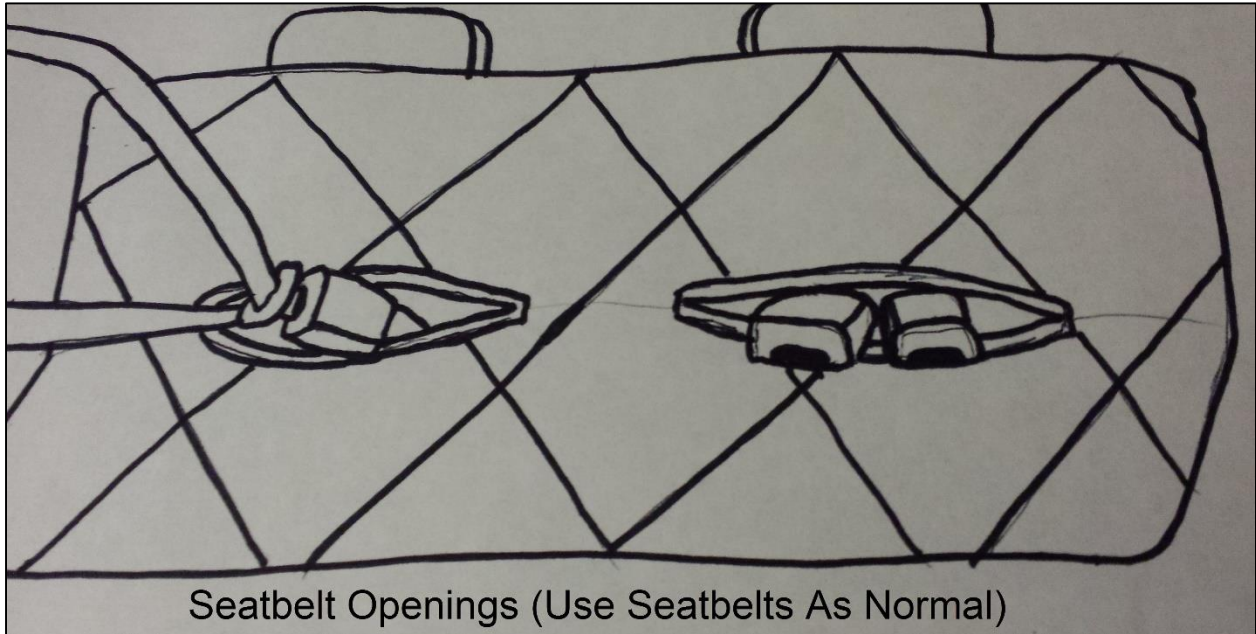

4. **Optional:** For even more support, pull each side door's seatbelt strap over the top of the car cover, open the velcro gate opening on the side, and slide the seatbelt through it and close the velcro. This will prevent the sides of the cover from flipping up.

5. **OPTION FOR CARS WITH NO HEADRESTS:** See the picture below. Most cars have a metal anchor or latch either on the back of the backseat or behind the seat just before the windshield (in most sedans). Please look around to find one that works. Simply loop the headrest straps through the metal latch and buckle them. If you have problems, contact support.

