
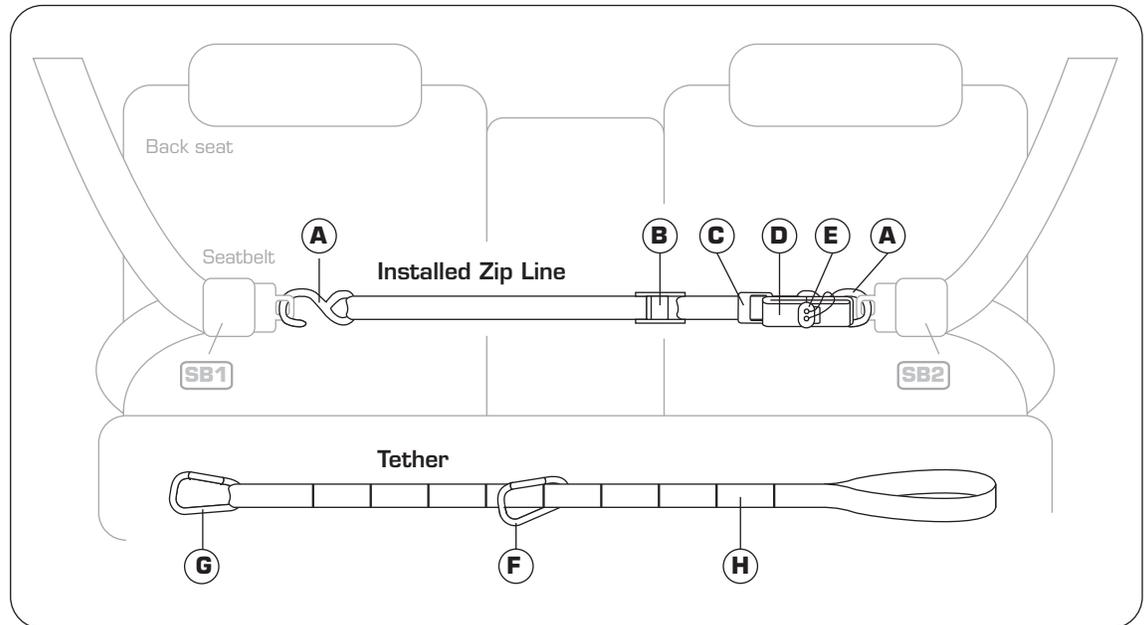





Instructions and care

The following is the recommended set up for the Auto Zip Line. When used in conjunction with a harness it represents the best way to keep your pup safe and out of the front seat. Note that the product is intended to restrain your pet and keep it from distracting you while driving, and does not guarantee protection from injury in every situation.

KEY

- (A) S-hook
- (B) Cam buckle
- (C) Metal slide
- (D) Extra Zip Line webbing
- (E) Bungee & toggle
- (F) Zip Line carabiner
- (G) Harness carabiner
- (H) Leash nook




Recommended set up for the Auto Zip Line:

1. Hook the two s-hooks (A) onto the rear passenger seatbelt tabs (SB1/SB2). The end of the zip line with the cam buckle (B) should be on the driver's side.
2. With your left hand, lock the rear driver's side seatbelt in place by swiftly pulling down on the seatbelt strap.
3. With right hand, grab extra zip line webbing (D) and apply constant pressure to the extra webbing to ensure that the seatbelt stays in the locked position. (see Fig. 1)
4. With left hand, reach over and lock the passenger seatbelt in position using the same swift pulling motion.
5. With the 2 seatbelts in the locked position pull on the extra zip line webbing in your right hand to remove all slack from the zip line. (See Fig. 2)
6. Feed extra webbing (D) through metal slide (C) to secure strap tension.
7. Roll up extra webbing (D) towards metal slide (C) and secure using bungees and toggle system (E). (See Fig. 3 & 4).
8. Tug on each seatbelt before attaching the dog to ensure they are in the correct locked position. This should be done before each trip.
9. Place the zip line carabiner (F) onto zip line.
10. Attach the harness carabiner (G) to your dog's harness (not included).
11. Locate appropriate leash nook (H) that lets your dog sit up and lay down and loop onto the carabiner (F) attached to the zip line.

NOTICE: Please contact Kurgo directly with any product or warranty inquiries.


Instructions and care

The following represent alternate ways in which the Auto Zip Line can be set up. While not the recommended set up, you may find that for your particular pet/vehicle these work better. Note that the product is intended to restrain your pet and keep it from distracting you while driving, and does not guarantee protection from injury in every situation.

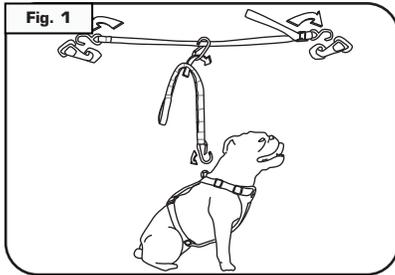


Passenger handle installation (Fig. 1)

1. Place the two s-hooks (A) onto the rear passenger handles.
2. Tighten the zip line by pulling the extra webbing through the cam buckle (B).
3. Roll up extra webbing toward cam buckle and secure using bungee and toggle (E) setup.
4. Place the zip line carabiner (F) onto zip line.
5. Attach the harness carabiner (G) to your dog's harness (not included), or seatbelt tab.
6. Locate appropriate leash nook (H) that permits your dog to sit up and lay down then loop onto carabiner attached to the zip line.

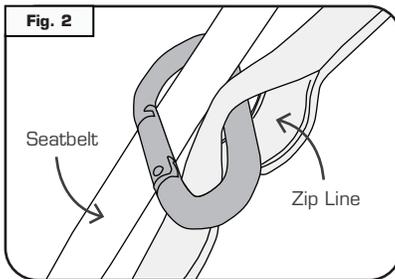


Seatbelt installation (Fig. 2)

1. Buckle seatbelt and attach the zip line carabiner (F).
2. Locate appropriate leash nook (H) that permits your dog to sit up and lay down and loop onto the carabiner attached to the zip line.
3. Attach the harness carabiner (G) to dog's harness (not included) or seatbelt tab.

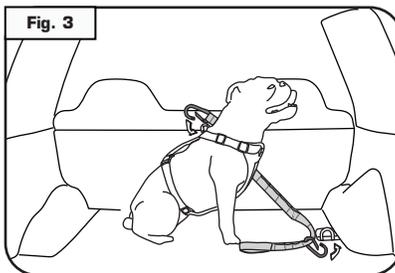

Cargo hook installation (Fig. 3)

1. Attach the zip line carabiner (F) to cargo hook in the rear of the vehicle.
2. Locate appropriate leash nook (H) that permits your dog to sit up and lay down and loop onto the carabiner attached to the cargo hook.
3. Attach the harness carabiner (G) to your dog's harness (not included) or seatbelt tab.

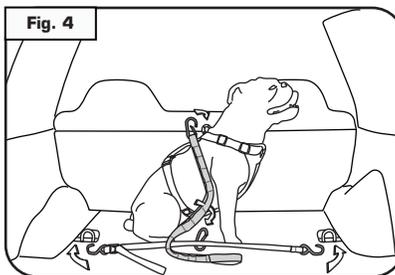

Cargo hook installation (Fig. 4)

1. Place the two s-hooks (A) onto the cargo hooks in the rear of the vehicle.
2. Tighten the zip line by pulling the extra webbing through the cam buckle (D)
3. Roll up extra webbing toward cam buckle and secure using the bungee and toggle (E) set up.
4. Place the zip line carabiner (F) on to zip line and harness carabiner (G) onto harness D-ring.
5. Locate the appropriate leash nook (H) that permits your dog to sit up and lay down and loop onto the carabiner.



Products displaying this symbol are intended to prevent dogs from entering the front seat where they can interfere with the driver and cause distracted driving accidents. They are intended to serve as either physical barriers to the front seat or restraints that keep pets from roaming around in the car. If used properly, they should keep dogs from entering the front seat, but they cannot guarantee containment nor protect from injury in every situation.

Cleaning Instructions

Our product cleaning instructions will help ensure that your gear has a long, exciting life. Washing by hand and hang air-drying is the best way to care for your Kurgo products.

Hand Wash Instructions

1. Brush off loose dirt with a dry brush.
2. Spot clean with a damp sponge, cold water, and mild soap. Avoid harsh detergents.
3. If necessary, rinse larger area to eliminate excess soap residue.
4. Hang to air dry (do not machine dry).



NOTICE: Please contact Kurgo directly with any product or warranty inquiries.